INLGBO4IRA

4.1 MP Vandal Proof Motorized Lens Bullet Network Camera w/IR, SD Slot

- Incredible 4MP Auto Focus Lens; ready-to-operate!

- H.265+ & H.264 encoding

- Smart IR, Up to 30 m (98ft) IR distance

- Smart Detection: Intrusion, Human Detection and more

- Supports Micro SD Card, up to 256GB

NDAA
Compliant

Unify your Security Solution
You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation.

Smart H.265+ & H.264+
LEGEND smart encoding technology provides high-quality video with higher efficiency and also reduces the cost of storage space and transmission bandwidth by adopting an advanced algorithm of auto stream control.

On- board Analytics
This camera responds accurately to specific events in a given area. Our algorithm enables Human detection, intrusion detection, motion detection and much more. Facilitate your viewing experience using on the edge analytics – one product, multiple features.

*Design and specifications are subjects to change without notice.

INLGBO4IRA

4.1 MP Vandal Proof Motorized Lens Bullet Network Camera w/IR, SD Slot

Camera	
Image Sensor	1/3", 4 Megapixel, progressive scan, CMOS
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1~1/100,000 s
Minimum Illumination	Color: 0.01 Lux (F1.6, AGC ON) 0 Lux with IR
S/N Ratio	Less than 52
IR Distance	Distance up to 30m (98ft)

Camera Features	
Day/Night	IR-cut filter with auto switch (ICR)
Backlight Compensation	Supported
Noise Reduction	2D/3D DNR
Features	HLC; BLC; DWDR
Privacy Masking	Up to 4 areas
OSD	Up to 4 OSDs
Region of Interest	Up to 2 areas
Motion Detection	Up to 4 areas

Lens	
Lens Type	Motorized Lens
Focal Length	2.8mm ~ 12mm
Viewing Angle	H: 91.0° ~ 27°; V: 54.4° ~ 13.7°; O: 118.3° ~ 33.2°
Pan/Tilt/Rotate	Pan: 0° ~ 360°; Tilt: 0 ~ 90°; Rotate: 0 ~ 360°

DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8	63.0	25.2	12.6	6.3
	12	270	108	54	27

Video	
Compression	H.265+, H.265, H.264, MJPEG
H.264 code profile	Baseline Profile, Main Profile
Frame Rate	Main Stream: 4MP (2592x1520), Max 20fps Sub Stream: 720P (1280x720): Max. 20 fps Third Stream: D1 (704x576): Max. 20 fps

Smart Detetion	
Intelligent Search	Intrusion, Human Detection, Motion detection, Tampering alarm
Intrusion	Entering and loitering in a pre-defined virtual region

INLGBO4IRA

4.1 MP Vandal Proof Motorized Lens Bullet Network Camera w/IR, SD Slot

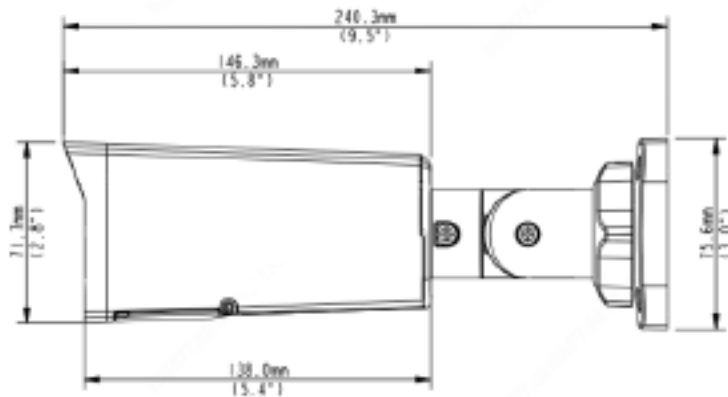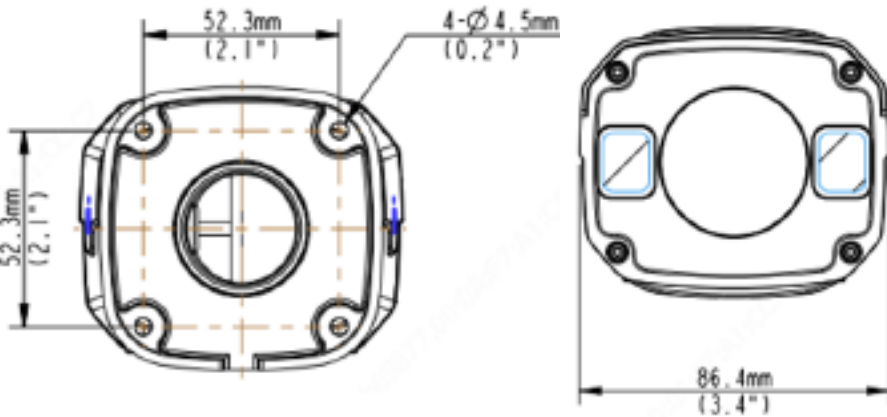| Network	
Ethernet	1 RJ45 100M Base-TX Ethernet
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL,QoS
Compatibility	ONVIF (Profile S, Profile G, Profile T), API
Storage	
Edge Storage	Micro SD card, up to 256GB
General	
Power Supply	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Less than 6.5W
Working Environment	-30°C to 60°C (-40°F to 140°F) / Less than 95% RH
Protection	IP67; IK10
Weight	2.2 lbs (1kg)
Dimensions	240.3 × 86.4 × 75.6mm (9.46" × 3.4" × 2.98")

INAXSYS SECURITY SYSTEMS INC.

INLGBO4IRA

4.1 MP Vandal Proof Motorized Lens Bullet
Network Camera w/IR, SD Slot

**XLGJB06-A
Junction Box**

**XLGA01
Waterproof Joint**

**VUSD256G
Micro SD Card**

**XLGUP06-C
Pole Mount**

Optional

**XLGJB06-A
Junction Box**

**XLGA01
Waterproof Joint**

**XLGUP06-C
Pole Mount**

*Design and specifications are subjects to change without notice.